
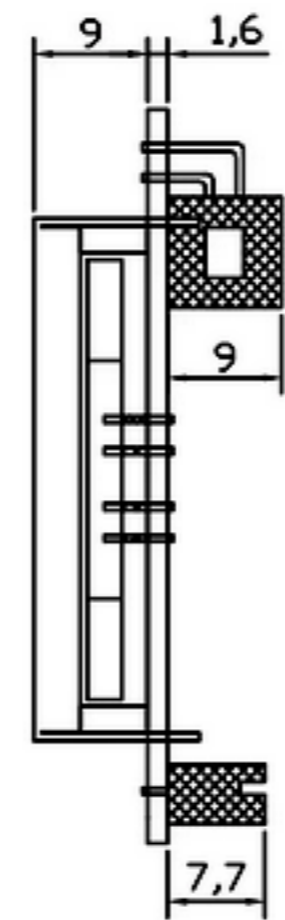


REV:	DESCRIPTION	BY	DATE
V01			

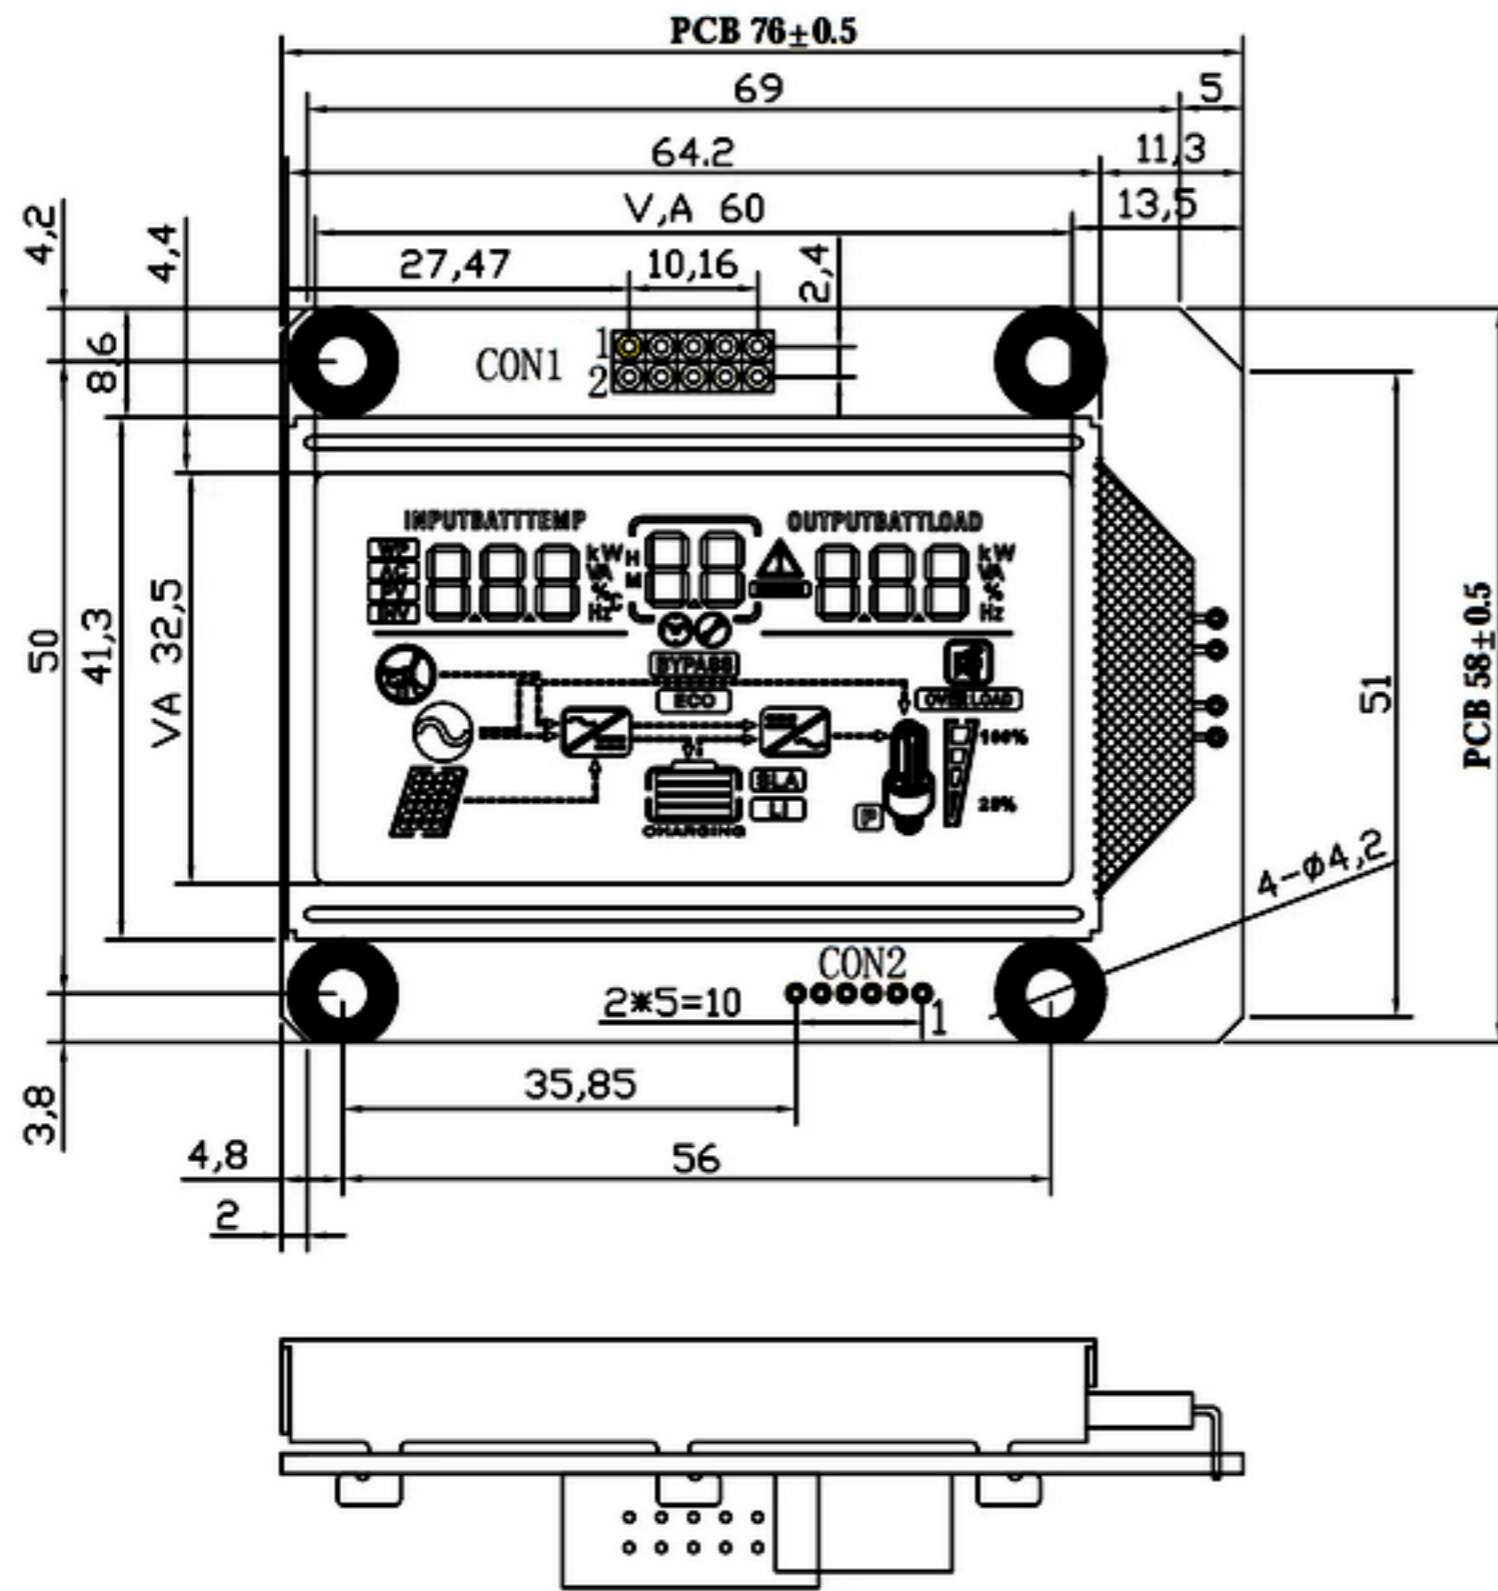

Pin	CON1	CON2
1	DATA	NC
2	WR	FUNCT2
3	BL+	VDD=5V
4	CS	FUNCTION
5	VSS	ON. P
6	FUNCT2	SW2
7	VDD=5V	
8	FUNCTION	
9	ON. P	
10	SW2	

DISPLAY TYPE: HTN/BLUE
VIEWING DIRECTION:12:00-CLOCK
DRIVE METHOD: 1/4 DUTY,1/3 BIAS
OPERATING VOLTAGE: 5.0V LCM
OPERATING TEMP:-10 TO 60 Deg. C
STORAGE TEMP: -20 TO 70 Deg. C
CONNECTOR: COB HT1621
UNSIGNED TOLERANCE: ±0.20
BACKLIGHT: WHITE

		深圳市晶达显示技术有限公司 Shenzhen Jingda Display Technology Co., Ltd	
SHEET: 1 of 1			
APPROVALS	DATE		
DWN	HDB	2020-2-25	
CHK			
MODEL NUMBER :		SCALE:	UNITS:
JDA0801-16037C1		GENERAL TOL:± 0.2	MM
DO NOT SCALE THIS DRAWING.			