


## Trimming Potentiometer

**3266P**





**Part Number**

**3266P-B 50K**


Taper

Resistance value


### Dimensions

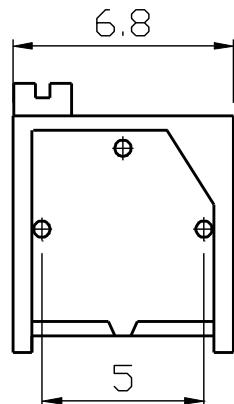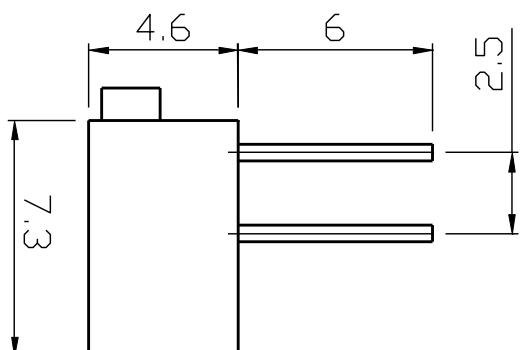

### Mounting Hole Details

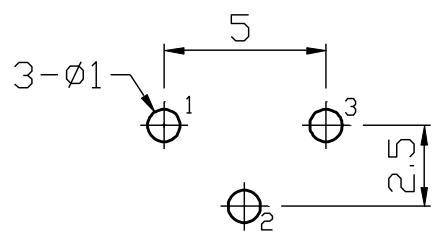

### Circuit



## Trimming Potentiometer

### Electrical Characteristics

<b>Operating temperature</b>	-55°C ~ +125 °C
<b>Total resistance</b>	<b>100Ω ~ 1MΩ</b>
<b>Resistance tolerance</b>	<b>±10%</b>
<b>Resistance taper</b>	<b>Linear (B)</b>
<b>Residual resistance</b>	<b>Term1-2: Less than 10Ω Term2-3: Less than 10Ω ≥ 1KΩ 1%R</b>
<b>Rated power(W)</b>	<b>0.25W/70°C ; 0W/125°C</b>
<b>Insulation resistance</b>	<b>More than 100 MΩ at DC 500 V</b>
<b>Resistance temperation coefficient</b>	<b>±100 ppm/°C</b>

### Mechanical Characteristics

<b>Effective Travel</b>	<b>12T±2T Cycles</b>
<b>Rotational torque</b>	<b>30~350 gf.cm</b>
<b>Rotational life</b>	<b>200 Cycles.</b>