



MMBT3906

SMALL SIGNAL PNP TRANSISTOR


PRELIMINARY DATA

| Type | Marking |
|----------|---------|
| MMBT3906 | 36 |

- SILICON EPITAXIAL PLANAR PNP TRANSISTOR
- MINIATURE SOT-23 PLASTIC PACKAGE FOR SURFACE MOUNTING CIRCUITS
- TAPE AND REEL PACKING
- THE NPN COMPLEMENTARY TYPE IS MMBT3904


APPLICATIONS

- WELL SUITABLE FOR PORTABLE EQUIPMENT
- SMALL LOAD SWITCH TRANSISTOR WITH HIGH GAIN AND LOW SATURATION VOLTAGE



SOT-23

INTERNAL SCHEMATIC DIAGRAM



DS10120

ABSOLUTE MAXIMUM RATINGS

| Symbol | Parameter | Value | Unit |
|-----------|---|------------|------------------|
| V_{CBO} | Collector-Base Voltage ($I_E = 0$) | -60 | V |
| V_{CEO} | Collector-Emitter Voltage ($I_B = 0$) | -40 | V |
| V_{EBO} | Emitter-Base Voltage ($I_C = 0$) | -6 | V |
| I_C | Collector Current | -200 | mA |
| P_{tot} | Total Dissipation at $T_C = 25\text{ }^\circ\text{C}$ | 350 | mW |
| T_{stg} | Storage Temperature | -65 to 150 | $^\circ\text{C}$ |
| T_j | Max. Operating Junction Temperature | 150 | $^\circ\text{C}$ |

MMBT3906

THERMAL DATA

| | | | | |
|-----------------|-------------------------------------|-----|-------|------|
| $R_{thj-amb}$ • | Thermal Resistance Junction-Ambient | Max | 357.1 | °C/W |
|-----------------|-------------------------------------|-----|-------|------|

- Device mounted on a PCB area of 1 cm²


ELECTRICAL CHARACTERISTICS (T_{case} = 25 °C unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|------------------------|--|--|-----------------------------|------|----------------|--------|
| I _{CEX} | Collector Cut-off Current (V _{BE} = 3 V) | V _{CE} = -30 V | | | -50 | nA |
| I _{BEX} | Collector Cut-off Current (V _{BE} = 3 V) | V _{CE} = -30 V | | | -50 | nA |
| V _{(BR)CEO} * | Collector-Emitter Breakdown Voltage (I _B = 0) | I _C = -1 mA | -40 | | | V |
| V _{(BR)CBO} | Collector-Base Breakdown Voltage (I _E = 0) | I _C = -10 μA | -60 | | | V |
| V _{(BR)EBO} | Emitter-Base Breakdown Voltage (I _C = 0) | I _E = -10 μA | -6 | | | V |
| V _{CE(sat)} * | Collector-Emitter Saturation Voltage | I _C = -10 mA I _B = -1 mA I _C = -50 mA I _B = -5 mA | | | -0.25 -0.4 | V V |
| V _{BE(sat)} * | Base-Emitter Saturation Voltage | I _C = -10 mA I _B = -1 mA I _C = -50 mA I _B = -5 mA | -0.65 | | -0.85 -0.95 | V V |
| h _{FE} * | DC Current Gain | I _C = -0.1 mA V _{CE} = -1 V I _C = -1 mA V _{CE} = -1 V I _C = -10 mA V _{CE} = -1 V I _C = -50 mA V _{CE} = -1 V I _C = -100 mA V _{CE} = -1 V | 60 80 100 60 30 | | 300 | |
| f _T | Transition Frequency | I _C = -10mA V _{CE} = -20 V f = 100MHz | 250 | | | MHz |
| NF | Noise Figure | V _{CE} = -5 V I _C = -0.1 mA f = 10 Hz to 15.7 KHz R _G = 1 KΩ | | 4 | | dB |
| C _{CBO} | Collector-Base Capacitance | I _E = 0 V _{CB} = -5 V f = 100 KHz | | 6 | | pF |
| C _{EBO} | Emitter-Base Capacitance | I _C = 0 V _{EB} = -0.5 V f = 100 KHz | | 25 | | pF |
| t _d | Delay Time | I _C = -10 mA I _B = -1 mA | | | 35 | ns |
| t _r | Rise Time | V _{CC} = -3V | | | 35 | ns |
| t _s | Storage Time | I _C = -10 mA I _{B1} = -I _{B2} = -1 mA | | | 225 | ns |
| t _f | Fall Time | V _{CC} = -3V | | | 72 | ns |

* Pulsed: Pulse duration = 300 μs, duty cycle ≤ 2 %

SOT-23 MECHANICAL DATA

| DIM. | mm | | | mils | | |
|------|------|------|------|-------|------|------|
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| A | 0.85 | | 1.1 | 33.4 | | 43.3 |
| B | 0.65 | | 0.95 | 25.6 | | 37.4 |
| C | 1.20 | | 1.4 | 47.2 | | 55.1 |
| D | 2.80 | | 3 | 110.2 | | 118 |
| E | 0.95 | | 1.05 | 37.4 | | 41.3 |
| F | 1.9 | | 2.05 | 74.8 | | 80.7 |
| G | 2.1 | | 2.5 | 82.6 | | 98.4 |
| H | 0.38 | | 0.48 | 14.9 | | 18.8 |
| L | 0.3 | | 0.6 | 11.8 | | 23.6 |
| M | 0 | | 0.1 | 0 | | 3.9 |
| N | 0.3 | | 0.65 | 11.8 | | 25.6 |
| O | 0.09 | | 0.17 | 3.5 | | 6.7 |

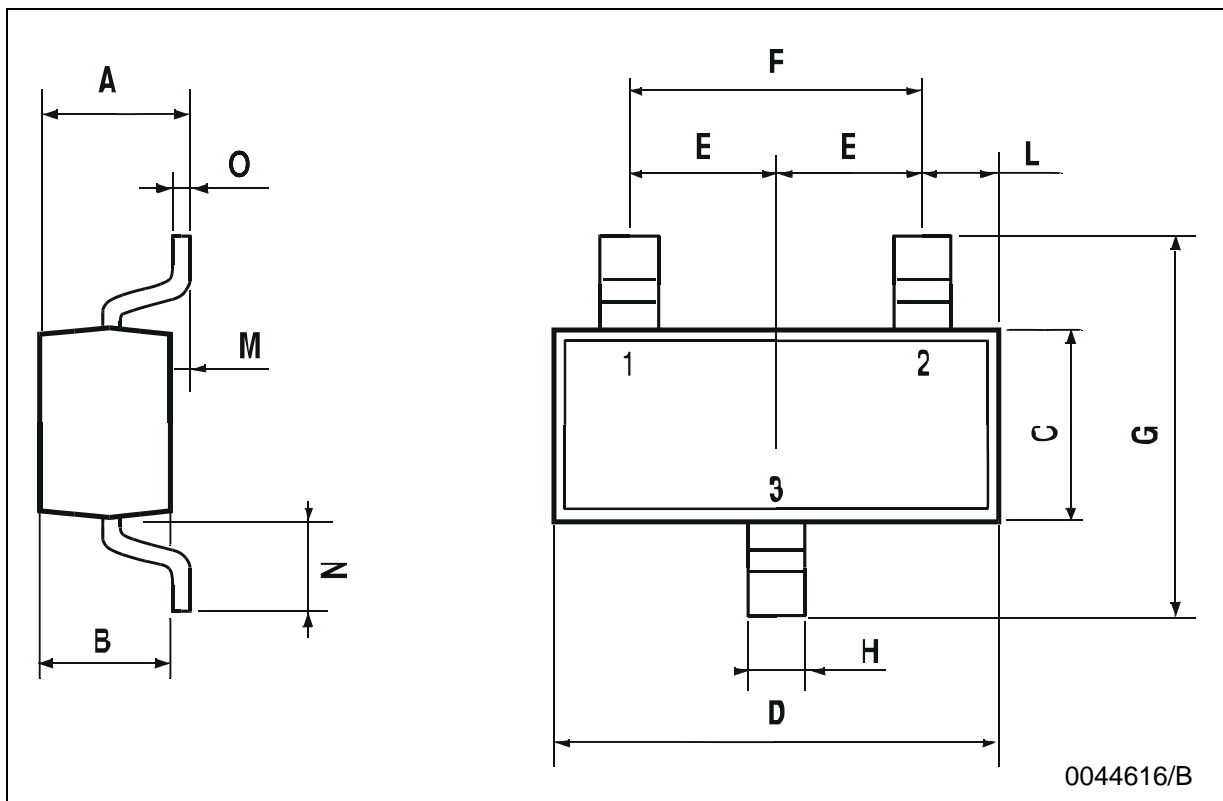

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a trademark of STMicroelectronics

© 2002 STMicroelectronics – Printed in Italy – All Rights Reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

<http://www.st.com>