




Positive Thermal Coefficient

RL60 Series

Positive Thermal Coefficient - RL60 Series

Positive Thermal Coefficient devices(PTC),provide over-current protection for electrical and electronic devices.They function using conducting strips of metal imbedded inside polymers.Under normal conditions,the devices resistance is near zero,but over-current conditions will heat the PTC and expand the polymer,increasing the impedance.When current returns to normal,the components cool down,returning to their original shape and very low levels of resistance.

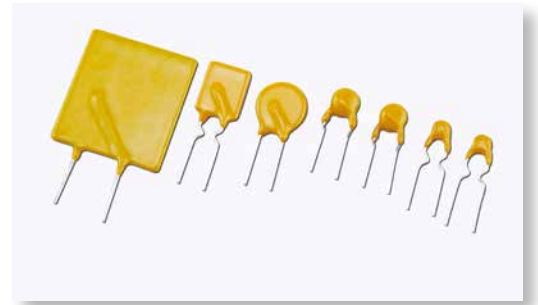


Features

- I(hold): 0.05~5A
- 60V Operating voltages
- Radial leaded devices
- Over-current protection
- Very high voltage surge capabilities.
- Available in lead-free version.
- Fast time-to-trip
- RoHS compliant, Lead- Free and Halogen-Free


Applications

- Overcurrent and overtemperature protection of automotive electronics
- Hard disk drives
- PC motherboards
- Point-of-sale (POS) equipment
- PCMCIA cards
- USB port protection - USB 2.0, 3.0 & OTG
- HDMI 1.4 Source protection
- Computers & peripherals
- Industrial control
- Security systems

Product Name

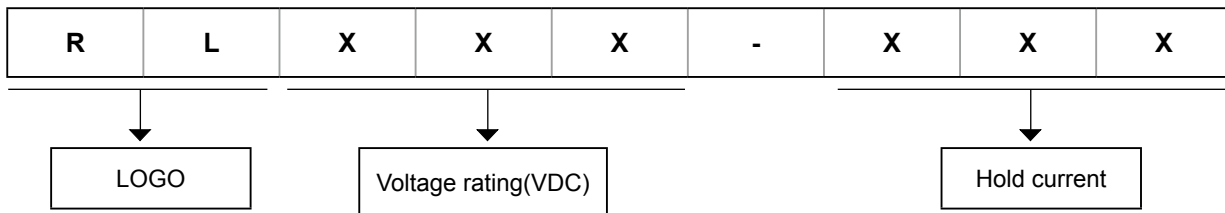

Positive Thermal Coefficient - RL60 Series

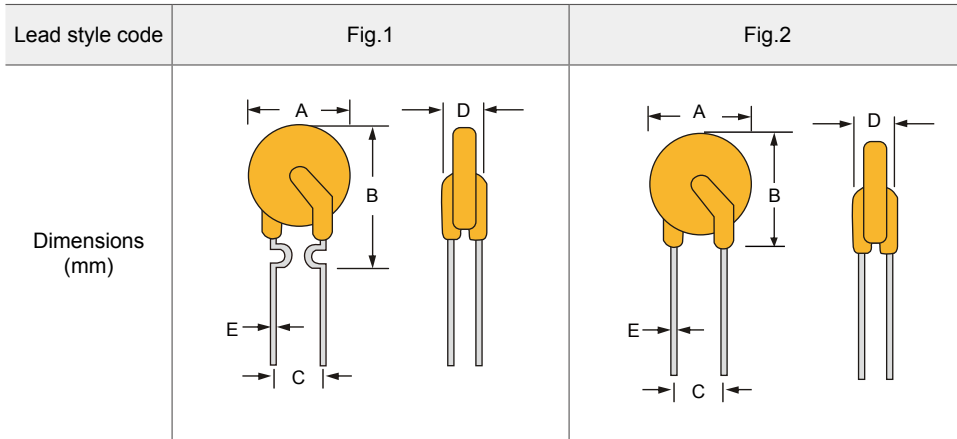

Type Number	I_{hold}	I_T	V_{max}	Time-to-Trip		I_{max}	R_{max}	R_{min}	Package Dimensions (mm)					Circuit Figure
	A	A	V	I_{trip} A	T_{max} S	A	Ω	Ω	A (max)	B (max)	C (max)	D (max)	E (max)	
RL60-005	0.05	0.1	60	0.15	10	40	25	8	6	8.5	5.1	3.1	0.5	Fig.1
RL60-010	0.1	0.2	60	0.3	10	40	7.5	3.5	6	8.5	5.1	3.1	0.5	Fig.1
RL60-017	0.17	0.34	60	0.51	10	40	5.21	2.84	7	8.5	5.1	3.1	0.5	Fig.1
RL60-020	0.2	0.4	60	0.6	10	40	3.1	1.83	7	8.5	5.1	3.1	0.5	Fig.1
RL60-025	0.25	0.5	60	0.75	10	40	1.95	1	7.5	8.5	5.1	3.1	0.5	Fig.1
RL60-030	0.3	0.6	60	0.9	12	40	1.5	0.7	6.7	15.7	5.1	3.1	0.5	Fig.1
RL60-040	0.4	0.8	60	1.2	12	40	1.2	0.5	7.2	14.2	5.1	3.1	0.5	Fig.1
RL60-050	0.5	1	60	1.5	12	40	0.85	0.35	7.5	14.5	5.1	3.1	0.5	Fig.1
RL60-065	0.65	1.3	60	1.95	12	40	0.6	0.25	9.1	16.1	5.1	3.1	0.5	Fig.1
RL60-075	0.75	1.5	60	2.25	12	40	0.6	0.25	9.8	16.8	5.1	3.1	0.6	Fig.1
RL60-090	0.9	1.8	60	2.7	12	40	0.45	0.18	11.7	18	5.1	3.1	0.6	Fig.1
RL60-110	1.1	2.2	60	3.3	15	40	0.38	0.15	12.5	18.5	5.1	3.1	0.8	Fig.2
RL60-135	1.35	2.7	60	4.05	15	40	0.31	0.12	14.5	19.6	5.1	3.1	0.8	Fig.2
RL60-160	1.6	3.2	60	4.8	15	40	0.22	0.09	16.3	21.3	5.1	3.1	0.8	Fig.2
RL60-185	1.85	3.7	60	5.55	15	40	0.19	0.08	17.8	22.9	5.1	3.1	0.8	Fig.2
RL60-250	2.5	5	60	7.5	20	40	0.13	0.05	21.3	26.4	10.5	3.1	0.8	Fig.2
RL60-300	3	6	60	9	20	40	0.10	0.04	24.8	29.8	10.5	3.1	0.8	Fig.2
RL60-375	3.75	7.5	60	11.25	20	40	0.08	0.03	27.0	32	10.5	3.1	0.8	Fig.2
RL60-500	5	10	60	15	25	40	0.03	0.02	28.5	33.5	10.5	3.1	0.8	Fig.2


- I_H = Hold current: maximum current device will pass without tripping in 25°C still air.
- I_T = Trip current: minimum current at which the device will trip in 25°C still air.
- V_{MAX} = Maximum voltage device can withstand without damage at rated current.
- I_{MAX} = Maximum fault current device can withstand without damage at rated voltage.
- R_{MAX} = Maximum resistance of device in initial (un-soldered) state.
- R_{MIN} = Minimum resistance of device in initial (un-soldered) state.
- P_d typ. = Typical power dissipation from device when in the tripped state at 25°C still air

Positive Thermal Coefficient - RL60 Series

Ihold Versus Temperature


Type Number	-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C
RL60-005	0.07	0.06	0.05	0.05	0.04	0.04	0.03	0.03	0.02
RL60-010	0.16	0.14	0.12	0.10	0.08	0.07	0.06	0.05	0.04
RL60-017	0.26	0.23	0.20	0.17	0.14	0.12	0.11	0.09	0.07
RL60-020	0.31	0.27	0.24	0.20	0.16	0.14	0.13	0.11	0.08
RL60-025	0.39	0.34	0.30	0.25	0.20	0.18	0.16	0.14	0.10
RL60-030	0.47	0.41	0.36	0.30	0.24	0.22	0.19	0.16	0.12
RL60-040	0.62	0.54	0.48	0.40	0.32	0.29	0.25	0.22	0.16
RL60-050	0.78	0.68	0.60	0.50	0.41	0.36	0.32	0.27	0.20
RL60-065	1.01	0.88	0.77	0.65	0.53	0.47	0.41	0.35	0.26
RL60-075	1.16	1.02	0.89	0.75	0.61	0.54	0.47	0.41	0.30
RL60-090	1.40	1.22	1.07	0.90	0.73	0.65	0.57	0.49	0.36
RL60-110	1.71	1.50	1.31	1.10	0.89	0.79	0.69	0.59	0.44
RL60-135	2.09	1.84	1.61	1.35	1.09	0.97	0.85	0.73	0.54
RL60-160	2.48	2.18	1.90	1.60	1.30	1.15	1.01	0.86	0.64
RL60-185	2.87	2.52	2.20	1.85	1.50	1.33	1.17	1.00	0.74
RL60-250	3.88	3.40	2.98	2.50	2.03	1.80	1.58	1.35	1.00
RL60-300	4.65	4.08	3.57	3.00	2.43	2.16	1.89	1.62	1.20
RL60-375	5.81	5.10	4.46	3.75	3.04	2.70	2.36	2.03	1.50
RL60-500	7.40	6.60	6.00	5.00	4.40	4.00	3.55	3.05	2.60

Average Time Current Curves

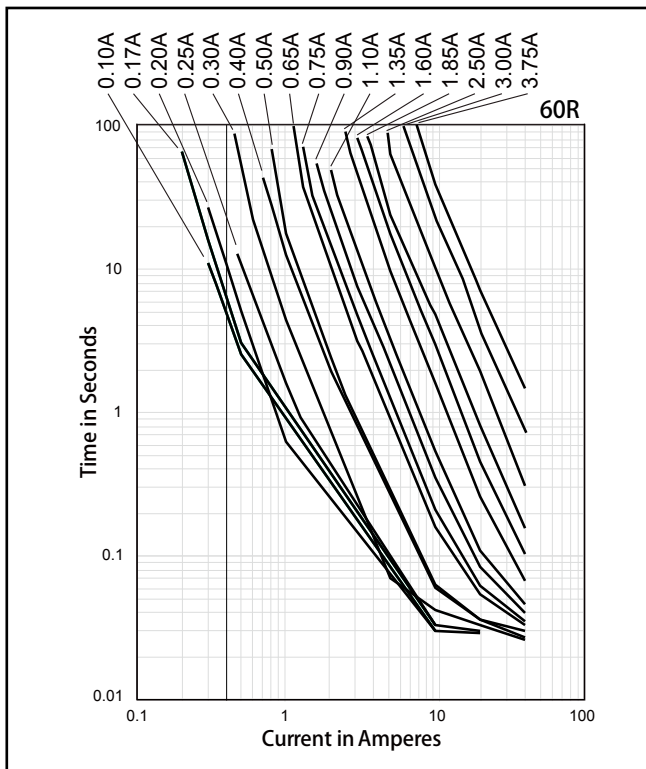

The average time current curves and Temperature Rerating curve performance is affected by a number of variables, and these curves provided as guidance only. Customer must verify the performance in their application.

Temperature Rerating Curve

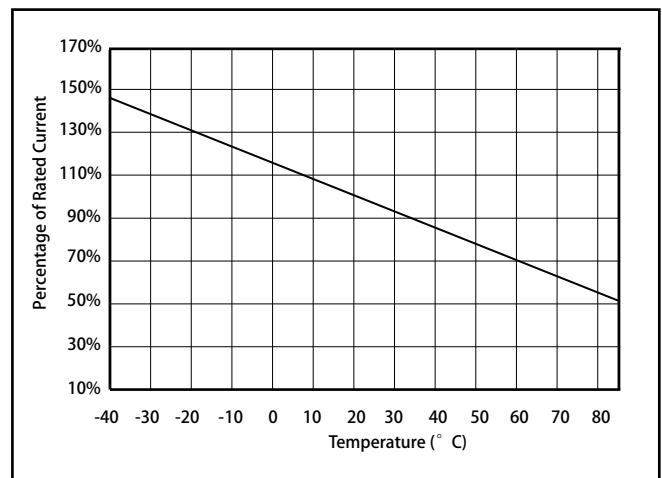

Positive Thermal Coefficient - RL60 Series

Manual Soldering Recommendation Parameters

Items	Conditions
Soldering condition	The highest power of the manual soldering iron should be 30W or less, soldering temperature should not be higher than 280℃ .
Soldering time	The soldering time should be kept within 3 seconds, otherwise it might cause insulation layer cracking, and increased part resistance.
Soldering position	The distance on the leads between the soldering point and bottom of the PPTC body should be equal or greater than 4mm.
Other	The soldering iron should not contact the PPTC body except the leads. If the soldering conditions are kept to lower temperature, less time and larger distance, the outcome of the soldering will be better.

Notes: 1. Before using the device must be stored in the original bags, if the storage conditions do not guarantee, the device may not be able to meet the given value.
 2. The devices can't used for reflow soldering.

Mechanical Characteristics


Items	Specifications	Test Conditions/Methods
Tensile strength	No visible damage	1.0Kgf, 10 seconds
Bending strength	No visible damage	0.5Kgf, 90°, 3 times
Vibration	No visible damage	Freq: 10-55Hz, Amp: 0.75mm, 1min

Mechanical Characteristics

Items	Specifications	Test Conditions/Methods
Solder ability	No visible damage, Solder OK, Solder area $\geq 95\%$	245±5℃ , 2±1s, dipping depth=0.5inch max from the body
Resistance to soldering heat	No visible damage, Electrical OK, $\Delta R/R0$ $\leq 50\%$	260±5℃ , 10+2/-0s
Damp heat, steady state	No visible damage, Electrical OK, $\Delta R/R0$ $\leq 20\%$	40±2℃ , 90~95 % RH, total 48Hrs, after 4Hrs test electrical parameter
Temperature cycling	No visible damage, Electrical OK, $\Delta R/R0$ $\leq 20\%$	Ta = -10+0/-1℃ 30min, Ta = 70+1/- 0℃ 30min, 5cycles, after 1hr test electrical parameter

Positive Thermal Coefficient - RL60 Series

Packaging

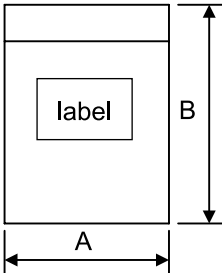Bag	Part Number	Dimension A×B (mm)	Quantity
	RL60-005 ~ RL60-185	150×200	1000pcs/bag
	RL60-250 ~ RL60-300	150×200	500pcs/bag
	RL60-375 ~ RL60-500	150×200	200pcs/bag

RuiLongYuan Electronics Co., Ltd.

- Reproducing and modifying information of the document is prohibited without permission from Ruilongyuan International Inc.
- Ruilongyuan International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Ruilongyuan International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Ruilongyuan International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Ruilongyuan International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Ruilongyuan International Inc. for any damages resulting from such improper use or sale.

Tel: +86-755-8290 8296

Fax: +86-755-8290 8002

E-mail: jack@ruilon.com