


Ninigi

D A T A S H E E T


ZL201 SERIES 2.54 MM (0.100") STRAIGHT PIN HEADER SINGLE ROW

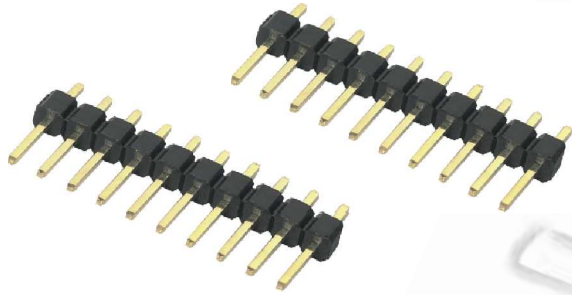

Specification:

- 1) To +105° Current Rate: 3 A
- 2) Dielectric Withstanding Voltage: 500 VAC
- 3) Insulation Resistance: 5000 MW
- 4) Temperature: -55°C ~ 105°C
- 5) Insulator: Thermoplastic (UL94V-0)
- 6) Contact: Copper Alloy
- 7) Contact Plated: Gold Flash


Series No.	No. of Contact (N)
ZL201-10G	10
ZL201-20G	20
ZL201-40G	40
ZL201-50G	50

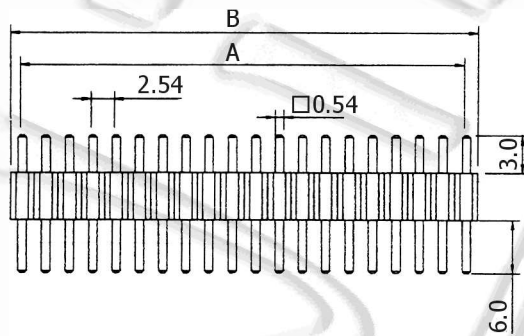

$$A = 2.54 * (N-1)$$

$$B = 2.54 * N$$

Pitch: 2.54 mm



All dimensions in mm.