


JQX-15FD(4503)

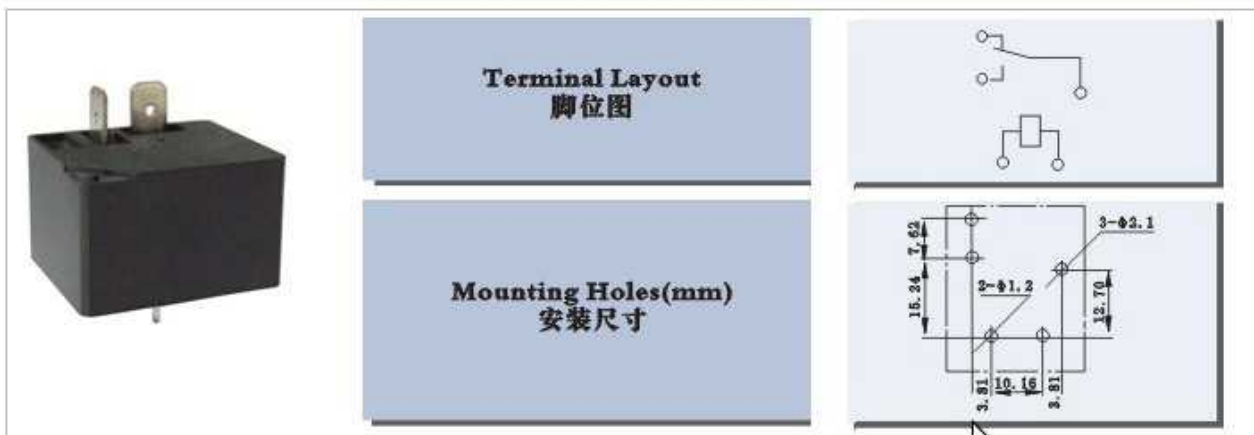

CLASSIFICATION		GENERAL PURPOSE RELAY
Appearance 外型		JQX-15FD(4503)
Outline Dimension(L×W×H) 外形尺寸(mm)		32.5×27.5×20.5
Contact Form 触点形式		1A,1B,1C
Contact Resistance 接触电阻		100mΩ
Coil Voltage 线圈电压		5VDC ~ 48VDC
Pick-up Voltage 动作电压		≤75%
Release Voltage 释放电压		≥10%
Coil Power(W) 线圈功率 (瓦)		0.9
Contact Rating 触点容量		20A,30A 240VAC/28VDC
Insulation Resistance 绝缘电阻		100MΩ
Dielectric Strength 介质耐压	Between Open Contact 断开触点间	1500VAC
	Between Coil and Contact 触点线圈间	2000VAC
Life 寿命	Electrical 电气	1×10 ⁵
	Mechanical 机械	1×10 ⁷
Temperature Range 使用温度		-55 ~ +85°C
Terminal Layout 脚位图		
Mounting Holes(mm) 安装尺寸		
Mounting Form 安装形式		PCB QUICKET Terminal
Weight 重量		32g
Safety Approval 安全标准		UL
Cross-Reference 型号对照		OMRON:G7G/G8P NAIS:JT ORIGINAL:ORU P&B:T93