


PIN ASSIGNMENT:

1	K
2	A
3	NC
4	/CS
5	/RST
6	A0
7	SCK
8	SDA
9	VDD
10	VSS
11	VO
12	XVO
13	VG
14	NC

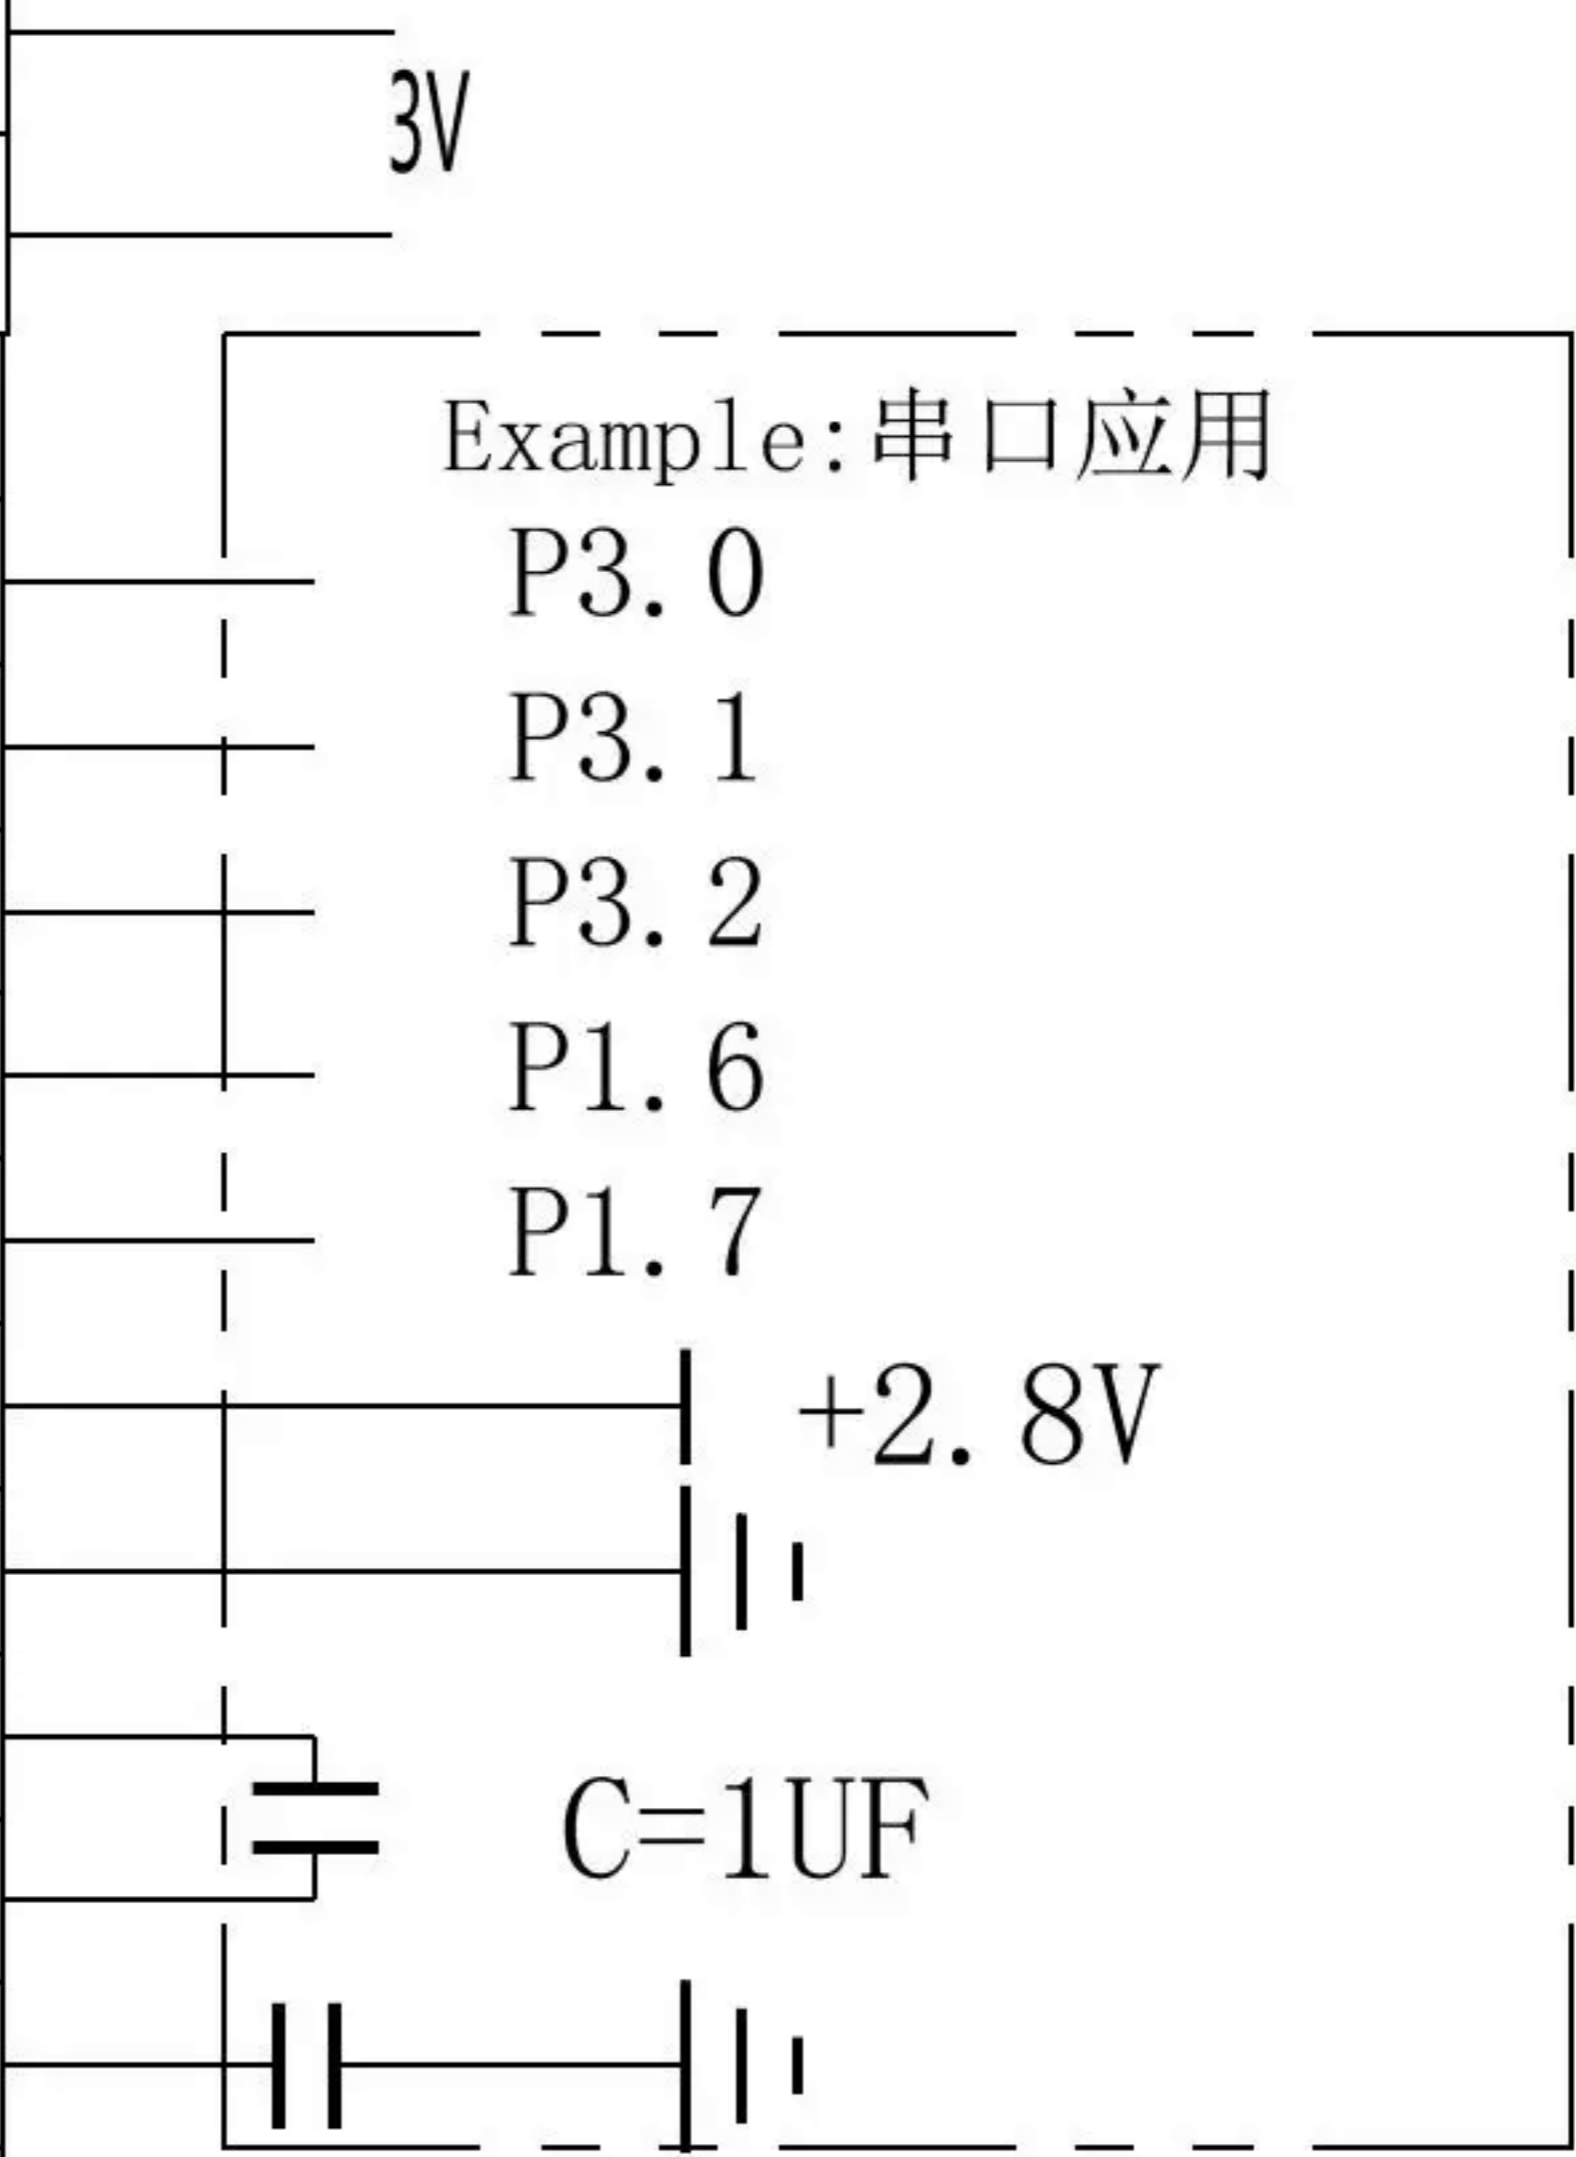


All Pages Of This Edition Approved

Signature: _____

Date: _____

REV.	DESCRIPTION	REVISER	DATE
A0	New Drawing		

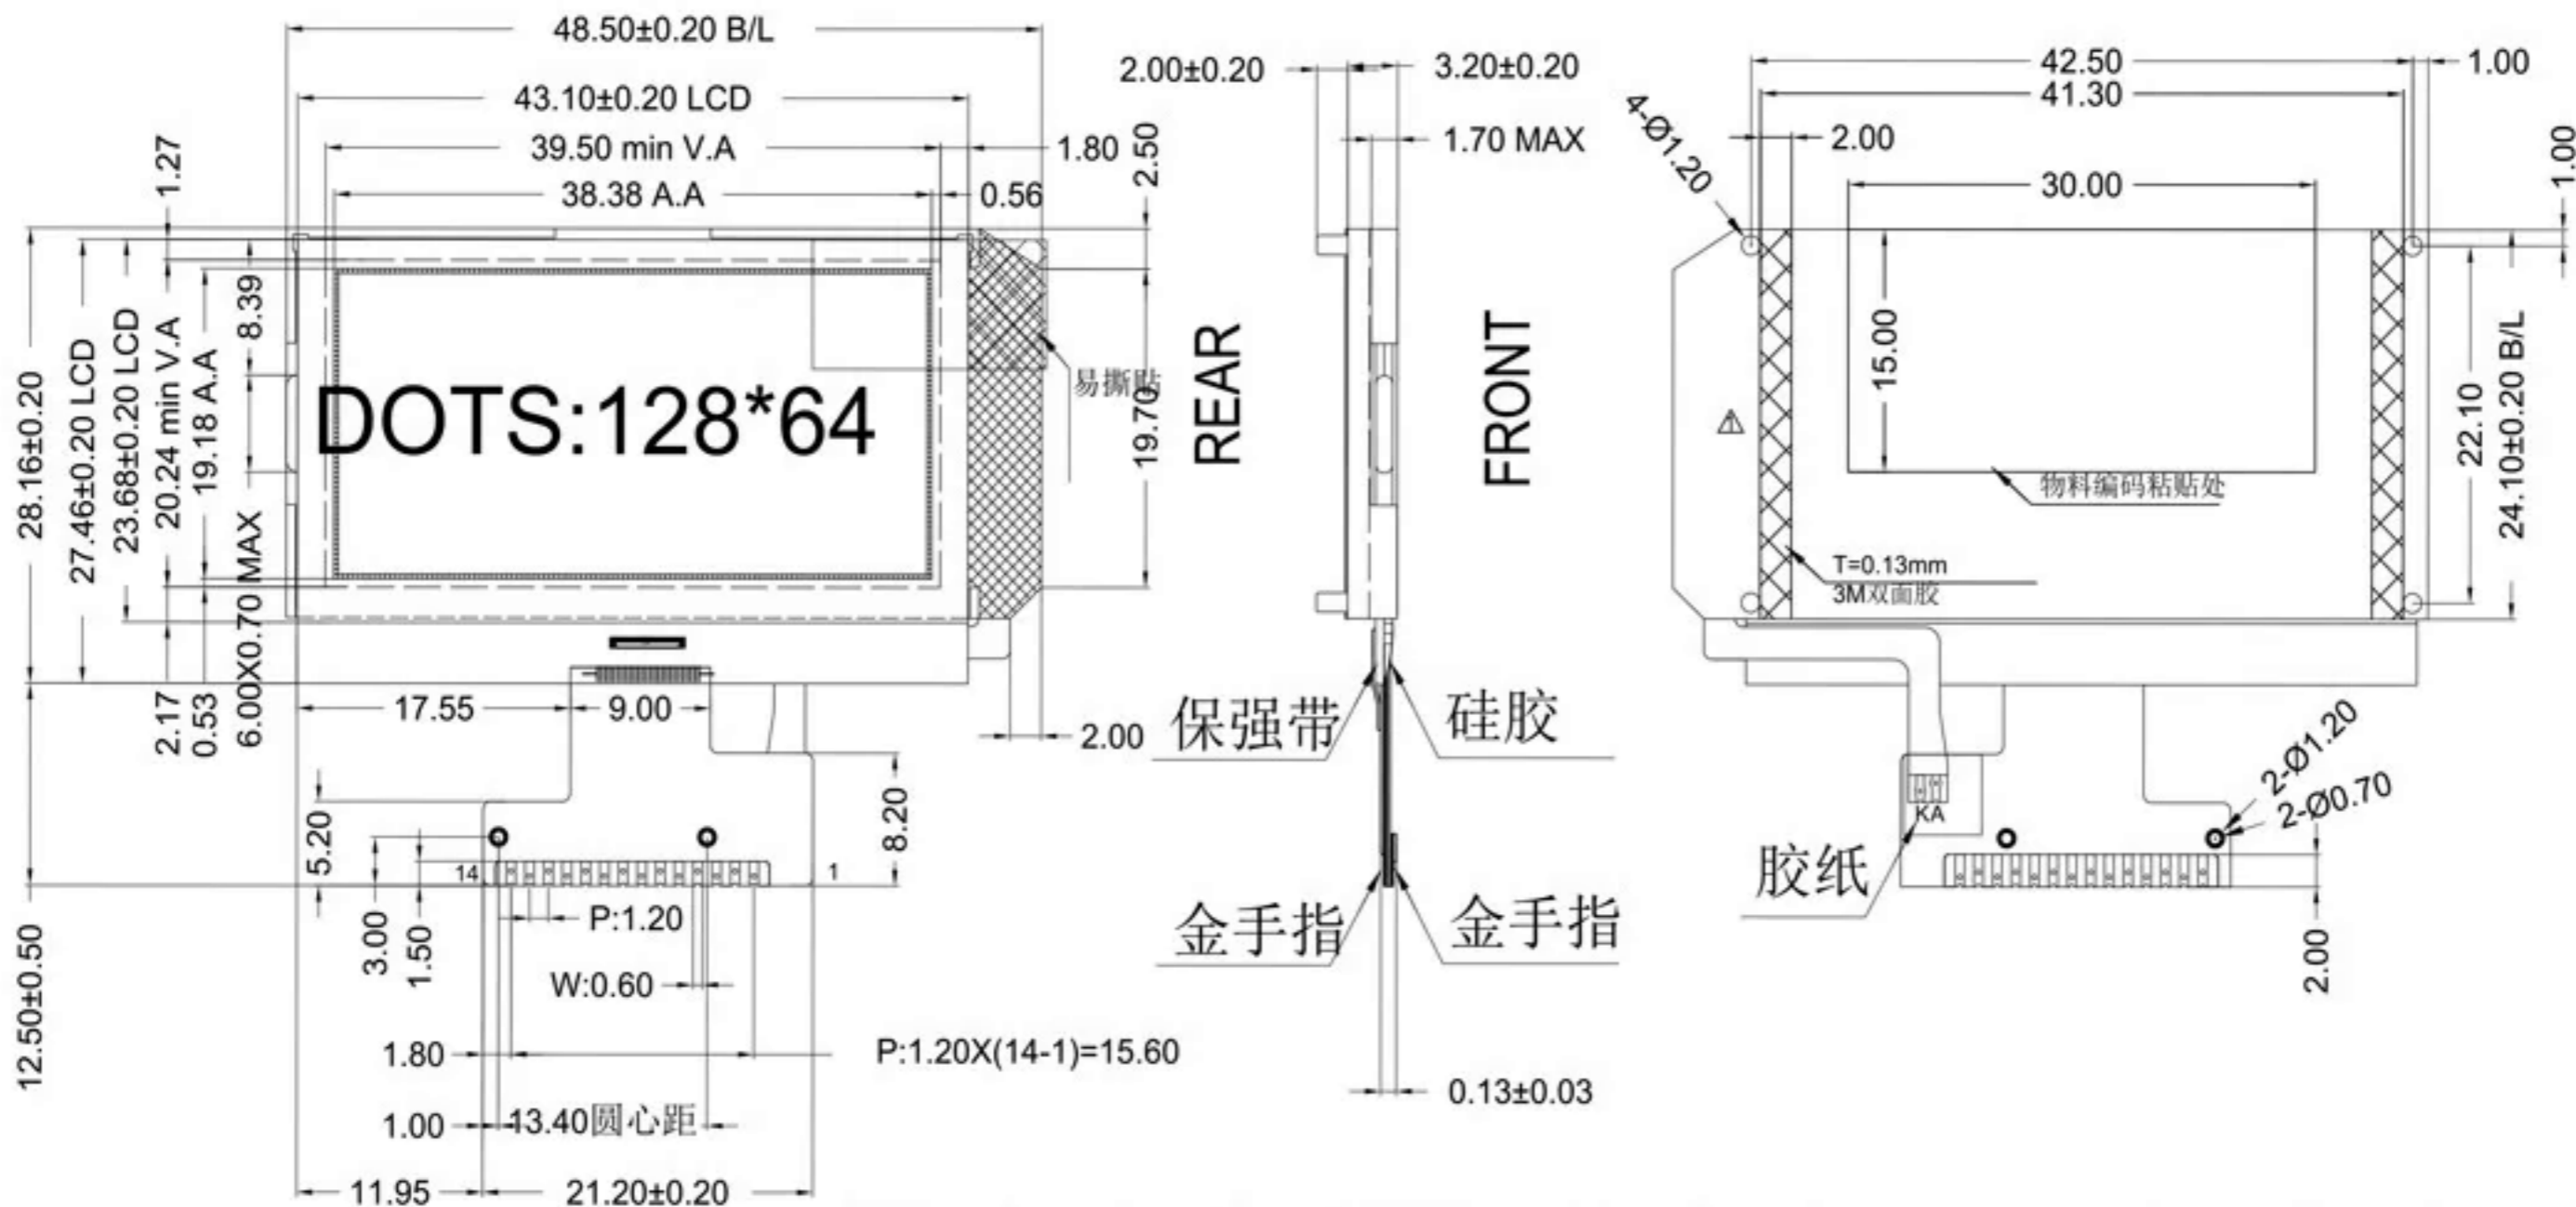

PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14
SYMBOL	K-	A+	NC	CSB	RST	A0	SCL	SDA	VDD	VSS	V0	XV0	VG	NC

SPECIFICATION:

Display Type	FSTN	Backlight	2pcs LED White
	Positive Transflective		2.8-3V
Drive Method	1/65 Duty	Customer' NO.	/
	1/9 Bias		/
Viewing Direction	6:00 O'clock	Top	-20°C~+70°C
Vop	9V	Tst	-30°C~+80°C
Vdd	3.3V	With***	Important Dimension
Drive IC	ST7567	With(*)	Reference Dimension
Environmental protection requirements: RoHS 2.0 <input checked="" type="checkbox"/> REACH <input type="checkbox"/> Halogen-free <input type="checkbox"/>			

深圳市迪通科技有限公司 SHENZHEN DETONE TECHNOLOGY

UNSPECIFIED TOLERANCE: ±0.3	UNITS: mm	DATE: 13-4-4	PART NUMBER: LCMD12864G-970	PROJECTION	SHEET: 1 Of 1
DESIGN BY: Dave	CHECKED BY: Thomos	APPROVED BY: Jack	DO NOT SCALE THIS DRAWING.		DRAWING DESCRIPTION: MODEL