


RoHS

REVISION DATE		
ITEM	DESCRIPTION	DATE
A	Issue	2012 05 14

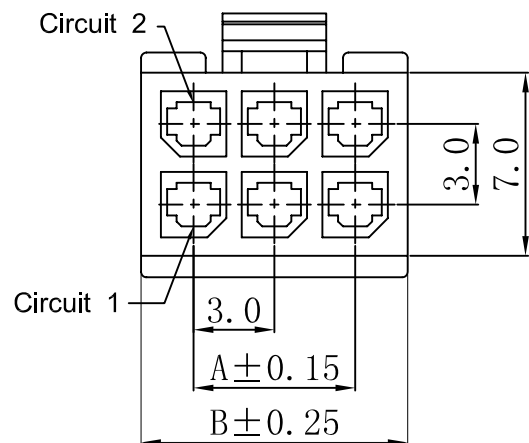

JVT3025HN0-2*XXXX

logo
Series
HSG
PA66 UL94V-0



无-本色
BK-黑色
单排PIN数

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC
- Current rating: 5.0A AC/DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000mΩ Min.
- Temperature range: -40°C - +105°C
- Contact resistance: 10mΩ Max.

■ HOUSING

- Part No. : JVT3025HN0-2*XXXX
- Poles: 02-24
- Material: Nylon 66 UL 94V-0
- Q' ty: 1000PCS/Bag

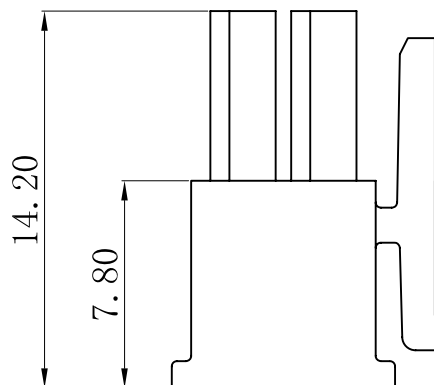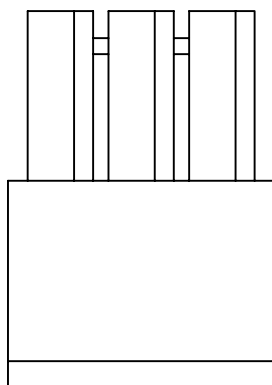

Poles	Dimensions (mm)	
	A	B
02	----	3.85
04	3.00	6.85
06	6.00	9.85
08	9.00	12.85
10	12.00	15.85
12	15.00	18.85
14	18.00	21.85
16	21.00	24.85
18	24.00	27.85
20	27.00	30.85
22	30.00	33.85
24	33.00	36.85

投影 (PROJECT)		公差 (TOLERANCE)
单位 (UNIT)	mm	0 ±0.50
比例 (SCALE)	FIT	0.0 ±0.30
版本 (EDITION)	A	0.00 ±0.20
日期 (DATE)	2012 05 14	0.000 ±0.10

东莞市乔业电子有限公司
DONG GUAN CHYAO YEE (JVT) CONNECTORS CO., LTD.

绘图 (DRAWN)	YongJun	料号 (PART NO)	JVT3025HN0-2*XXXX	页次 (PAGE)	
审核 (CHECKED)		图号 (DRAW NO)	031-3025	1/1	
核准 (APPROVE)		品名 (NAME)	MX3.0MM HSG Male Dual Row		